

WoodStone



Oven shown with optional stainless steel mantle.

Hearth Capacity

200 mm pizzas	12-16
250 mm pizzas	10-12
300 mm pizzas	8
400 mm pizzas	5

Assuming 5-minute cook times, the approximate maximum hourly production capacity can be calculated by multiplying the above numbers by 12.

Note: Highlighted capacities are considered an operational challenge.

OPTIONAL ACCESSORIES

- Doorway and Service Panel Extensions
- Stainless Steel or Black Granite Mantles
- Stainless Steel Oven Tools
- Custom Finishes
- Exhaust Fan
- Exhaust Hood
- Wood Burning Option
- Custom Wood Burning Accessories
- Multiple Opening Option

MT. ADAMS 5'

Stone Hearth Oven



Job Name	
Model	WS-MS-5-RFG-IR-CE
Item#	
Fuel Type	Dual Burner

The Mt. Adams Dual Burner, Gas-Fired oven features a standard door opening 760mm wide x 250mm high. The inside diameter of the oven floor is 1.3-m, resulting in a 1.4-square-meter cooking surface. The oven is suitable for installation with only 25mm side clearance to combustible building materials.

The dense, high-temperature ceramic formulation of which the hearth and dome are cast creates a "deep heat sink" within the chamber of the oven. The oven is primarily heated by an easily adjustable (30.8-kW max.) wall of radiant flame located at the rear of the cooking chamber. A 24.3-kW thermostatically controlled infrared burner mounted under the floor ensures constant deck temperatures. The combined effect of these heat sources makes the Mt. Adams a very powerful and responsive stone hearth oven.

The 500-Kg, monolithic, cast-ceramic floor sits on 100mm of rigid insulation and is poured to a thickness of 100mm. The 500-Kg, monolithic dome is also cast to a thickness of 100mm. The hearth and dome are connected and supported by a carefully tensioned steel exoskeleton, which ensures structural integrity and long life. The body of the oven rests on a 10-gauge steel pan bolted to a heavy-duty, 75mm angle iron stand. The oven is wrapped with at least 50mm of spun ceramic fiber insulation and enclosed (top and sides) with 16-gauge galvanized steel. The oven arrives completely assembled and ready to set in place. The oven can be manufactured to burn either propane or natural gas; this must be specified at the time of order.

The Mt. Adams vents through a 254mm (O.D.) flue collar located above the doorway. The oven must be vented as a Type A or Type B₁₁ appliance, and in accordance with all applicable codes. For ovens that will be direct connected, order the optional flue adapter.

NATURAL GAS (METHANE)

I_{2H(20)} for use in: AT, DK, ES, FI, IE, IT, PT, GB, SE, CH, GR, EE, LV, SI, CR, SK, and CZ

I_{2E(25)} for use in: DE, PL

I_{2L(25)} for use in: NL, HU

I_{2HS(25)} for use in: HU

PROPANE and PROPANE BLENDS

I_{3P(37)} for use in: FI, DE, GR, IE, HR, LU, NL, PL, SK, SI, ES, CH, TR and GB

I_{3P(50)} for use in: CY, CZ, MT and SK

I_{3+(28-30,37)} for use in: BE, CY, CZ, EE, FR, GR, IE, IT, LT, LU, LV, PT, RO, SK, ES, CH and GB

I_{3B/P(30)} for use in: BG, CY, CZ, DK, EE, FI, GR, HR, LV, LT, LU, MT, NL, NO, SK, SI, SE and TR

I_{3B/P(37)} for use in: PL

I_{3B/P(50)} for use in: AT, DE, HU, SK, CH

CE
359BN308

WoodStone

An ongoing program of product improvement may require us to change specifications without notice.
Revised August 2009

WOOD STONE CORPORATION
1801 W. Bakerview Rd.
Bellingham, WA 98226 USA

Toll Free (800) 988-8103
Tel (360) 650-1111
Fax (360) 650-1166


info@woodstone-corp.com or visit www.woodstone-corp.com



MT. ADAMS 5'

Dual Burner, Gas-Fired Oven

Model
WS-MS-5-RFG-IR-CE

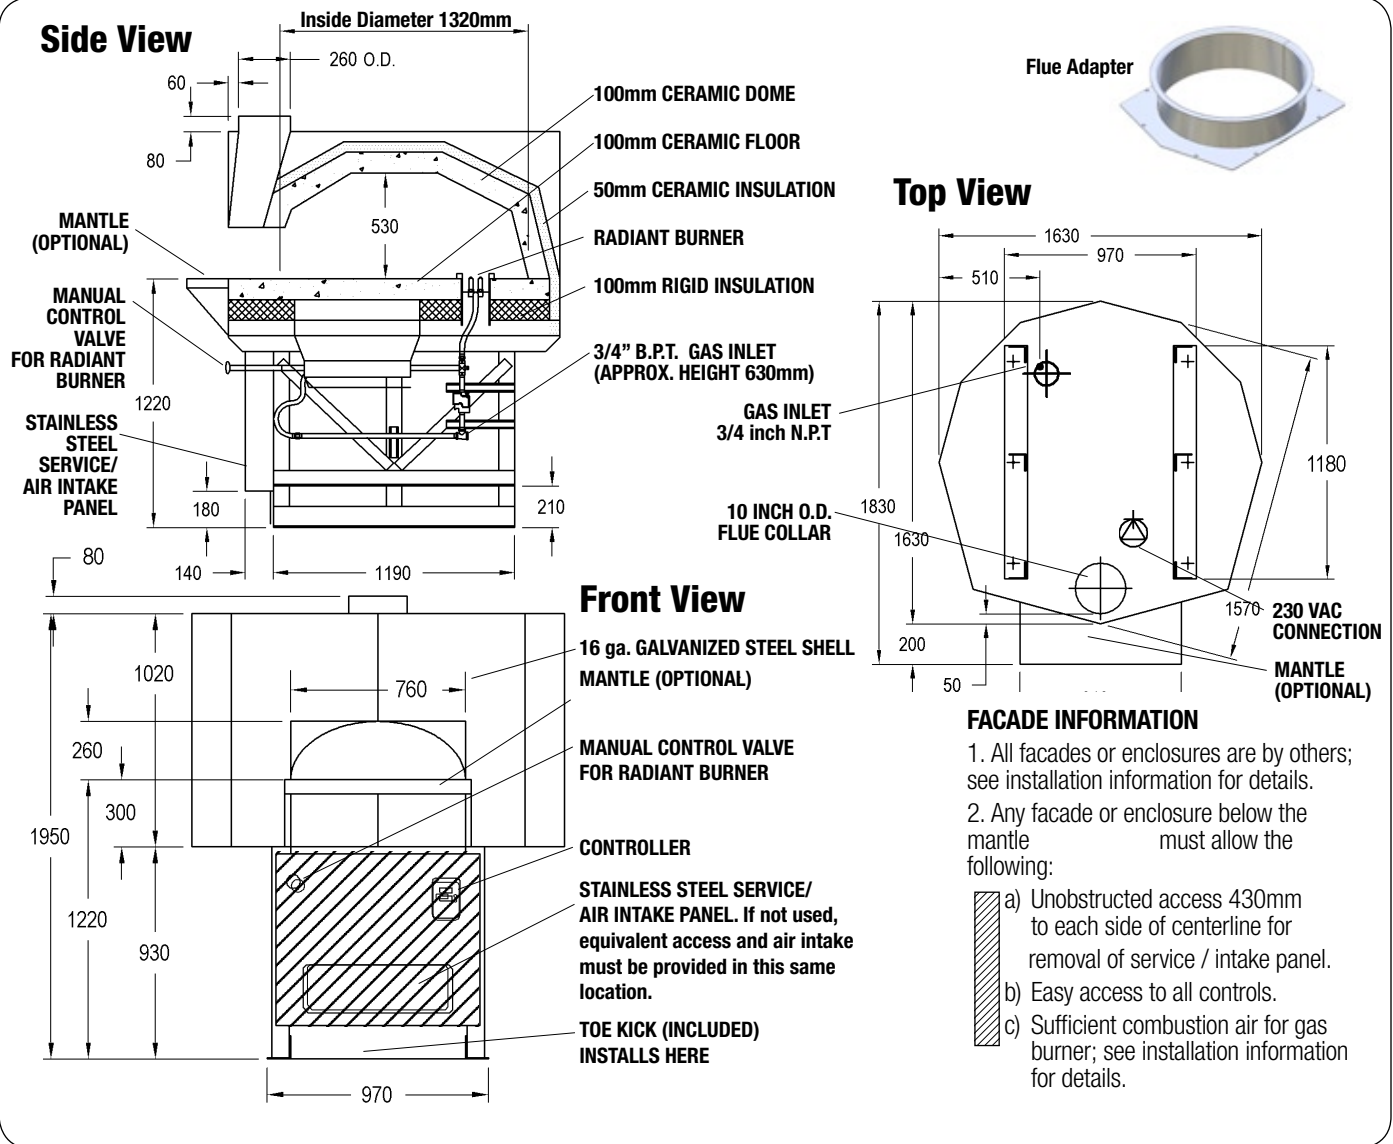

UTILITIES REQUIRED:

230-VAC/ 0.5-AMP Electrical Supply
The oven's gas inlet is 19 mm B.P.T. Female

VENTING INFORMATION

The Mt. Adams vents through a 254mm (O.D.) flue collar located above the doorway. The oven must be vented as a Type A or Type B₁ appliance, and in accordance with all applicable codes. For ovens that will be direct connected, order the optional flue adapter.

En 437 Gas Group	I _{2H}	I _{2E} and I _{2L}	I ₃₊	I _{3B/P(30)}	I _{b/d(50)}	I _{3D}
Inlet Pressure (mbar)	20	25	28-30/37/50	30	50	30/37/50

	Declared Input (kW)			
	I _{2H} , I _{2L} and I _{2E}	I _{3+(28-30/37/50)}	I _{3B/P(30-50)}	I _{3P(30/37/50)}
WS-MS-5-RFG-IR-CE	55.1	46.6	46.6	46.6

Unit Shipping Weight: 1,630 Kg



An ongoing program of product improvement may require us to change specifications without notice.
Revised August 2009

WOOD STONE CORPORATION
1801 W. Bakerview Rd.
Bellingham, WA 98226 USA

Toll Free (800) 988-8103
Tel (360) 650-1111
Fax (360) 650-1166

info@woodstone-corp.com or visit www.woodstone-corp.com