

Wood Stone



OPTIONAL ACCESSORIES

- Rear Access Door
- Countertop Configuration
- Additional Skewers, Bird Bells and Hooks

WHATCOM

Gas Vertical Rotisserie



Job Name	
Model	WS-GVR-10
Item#	
Fuel Type	Gas-Fired

The unique design of the Whatcom Rotisserie allows different foods to be cooked at the same time, in the same rotisserie, without exchanging flavors (cross contamination). The Whatcom has 10 spit locations (stations), allowing an enormous variety of products to be cooked simultaneously.

The rotisserie comes standard with a tempered glass front door, so that the cooking process is fully visible to chefs and customers alike. Although the front-loading model is standard, the Whatcom is available with an optional rear access glass door, so that it can be loaded from either side. It also features a constant drip water bath, so that grease from the cooking products is constantly being removed from the cabinet. The water bath is equipped with a removable stand pipe for ease of cleaning.

The cabinet of the Whatcom Rotisserie is constructed of 16-gauge polished stainless steel. The standard unit is on legs equipped with heavy-duty, non-marking casters, however, the Whatcom can be ordered as a counter-top model.

The Whatcom is powered by three gas burners: two programmable IR burners (in the front corners of the cabinet), and a showy and powerful radiant flame post, located in the center of the unit. The IR burners operate on a ten minute cycle, and can be programmed to burn for any percentage of that cycle. They can also be turned off completely so that the rotisserie is powered by the center flame post alone. The drum of the rotisserie turns at a speed of 1.5 revolutions per minute. Each spit connection (or station) rotates approximately 6.5 times during every revolution of the drum.

The unit comes standard with a variety of spits: 9 bird bells, 5 small item skewers, and 5 three-prong rib/meat hooks. A maximum of 3 bird bells can be hung from one station, but birds can not be cooked at adjacent stations; this gives the Whatcom a maximum capacity of 15 birds.

The Whatcom Vertical Rotisserie must be installed in accordance with NFPA 96 and all relevant national and local codes, and in a manner acceptable to the authority having jurisdiction.



Wood Stone

An ongoing program of product improvement may require us to change specifications without notice.
Revised July 2010

WOOD STONE CORPORATION
1801 W. Bakerview Rd.
Bellingham, WA 98226 USA

Toll Free (800) 988-8103
Tel (360) 650-1111
Fax (360) 650-1166

info@woodstone-corp.com or visit www.woodstone-corp.com




WHATCOM


Gas Vertical Rotisserie

Model WS-GVR-10


Front

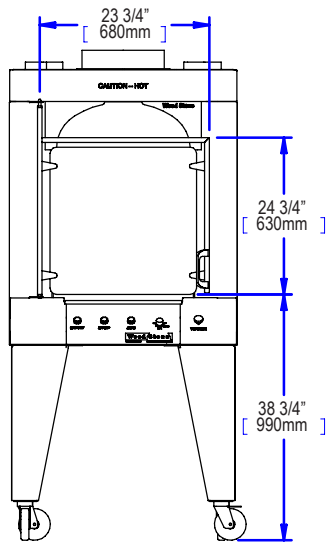


Side

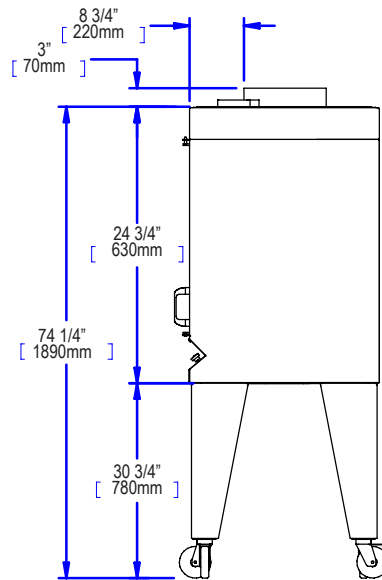


Back

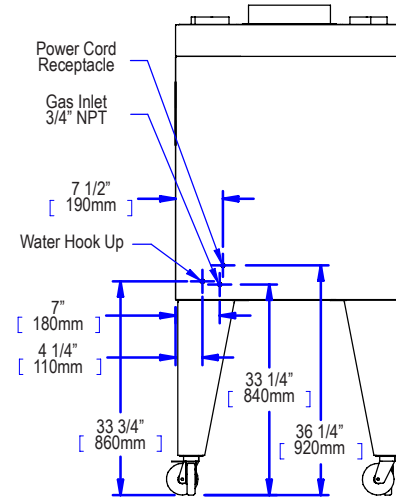

Top

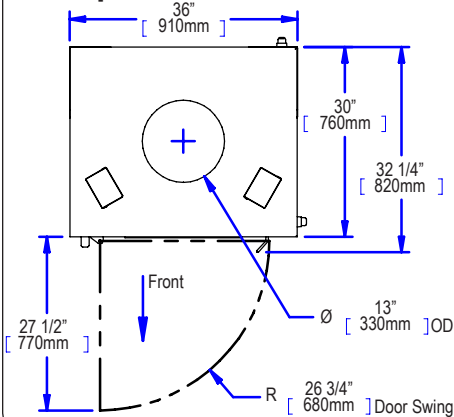

Bottom

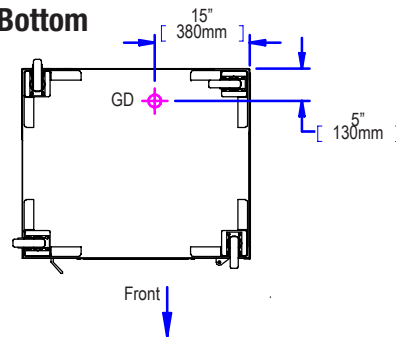

UTILITY SPECIFICATIONS

Note: This unit is on casters; utility hookups should be made in such a way as to allow mobility of the rotisserie for service and maintenance purposes. We recommend “quick disconnects” and flexible utility connections.

Electrical Provide 120 VAC, 15 Amp outlet (appliance is 1.3 Amp rated). Note: a grounded cord and plug (three prong) is provided by Wood Stone for a standard 120 volt outlet.

Water Provide incoming water supply equipped with a 1/4" N.P.T. (male) fitting.

Drain Provide connection to floor sink (grease trap) equipped with a 1/2" slip-fit (male) fitting.

Gas Rotisserie - Provide 115,000 BTU Natural Gas or 115,000 BTU Propane (LP) input. Rotisserie gas inlet is a 3/4" N.P.T. (female) fitting. The maximum inlet pressure is 0.5 PSI.

Venting - The rotisserie must be installed under an exhaust hood constructed and installed in accordance with NFPA 96 and all relevant local and national codes.

Unit Shipping Weight: 750 lbs.



An ongoing program of product improvement may require us to change specifications without notice.
Revised July 2010

WOOD STONE CORPORATION
1801 W. Bakerview Rd.
Bellingham, WA 98226 USA

Toll Free (800) 988-8103
Tel (360) 650-1111
Fax (360) 650-1166

info@woodstone-corp.com or visit www.woodstone-corp.com