

# Wood Stone

## Mt. Baker

Radiant Flame, Gas-Fired Stone-Hearth  
Oven with Wood Burning Option

Job Name: \_\_\_\_\_

Model: WS-MS-6-RFG-W

Item #: \_\_\_\_\_



Oven shown with optional stainless steel mantle.

Hearth Capacity	
8" pizzas	18 - 22
10" pizzas	11 - 13
12" pizzas	8 - 10
16" pizzas	6 - 8

## Optional Accessories

- **Stainless Steel or Black Granite Mantle**
- **Stainless Steel Oven Tool Set (with stainless steel hangers)**
- **Custom Finishes (stucco-ready, stainless steel, copper)**
- **Stack-Mounted Exhaust Fan**
- **Custom Oven-Mounted Exhaust Hood**

## The Mt. Baker Radiant Flame, Gas-Fired Oven with Wood Burning Option

The Mt. Baker radiant flame, gas-fired oven features a standard door opening 36 inches wide x 10 inches high. The inside diameter of the oven floor is 62 inches, resulting in a 22-square-foot cooking surface. The oven is ETL Listed for installation with a 1 inch side clearance to combustible building materials.

The dense, high-temperature ceramic formulation of which the hearth and dome are cast creates a "deep heat sink" within the chamber of the oven. The oven is heated by an easily adjustable (105,000 BTU max.) wall of radiant flame located at the rear of the cooking chamber. The user also has the option of building a small wood fire on either side of the cooking chamber for additional ambience and flavor.

The 1,600-pound, monolithic, cast-ceramic floor sits on 4 inches of rigid insulation and is poured to a thickness of 4 inches. The 1,300-pound, monolithic dome is also cast to a thickness of 4 inches. The hearth and dome are connected and supported by a carefully tensioned stainless steel exoskeleton, which ensures structural integrity and long life. The body of the oven rests on a 10-gauge steel pan bolted to a heavy-duty, 3 inch angle iron stand. The oven is wrapped with at least 2 inches of spun ceramic fiber insulation and enclosed (top and sides) with 16-gauge galvanized steel. The oven arrives completely assembled and ready to set in place.

The Mt. Baker is ETL and ETL Sanitation Listed. The oven can be manufactured to burn either propane or natural gas; *this must be specified at the time of order.*

The oven vents through a 10 inch O.D. flue collar located above the doorway. Our gas ovens are listed for direct venting through a power-ventilated, grease-duct-rated chimney or through a Listed Type 1 exhaust hood or one constructed in accordance with all relevant local and national codes. The oven must be vented as a solid fuel appliance. The oven should be vented in accordance with all relevant local and national codes, and in a manner acceptable to the authority having jurisdiction.

The Mt. Baker Radiant Flame gas oven *can be* manufactured to be fully and easily convertible to a Dual Temperature gas oven (*this must be specified at time of order.*)



## Wood Stone

1801 W. Bakerview Rd. Corporation  
Bellingham, WA 98226

Toll Free (800) 988-8103  
Tel (360) 650-1111  
Fax (360) 650-1166

An ongoing program of product improvement may require us to change specifications without notice.

Revised October 2007



Call Us Toll Free 1-800-988-8103 [www.woodstone-corp.com](http://www.woodstone-corp.com)

# Mt. Baker

Radiant Flame  
Gas-Fired Oven with Wood  
Burning Option

Model

WS-MS-6-RFG-W

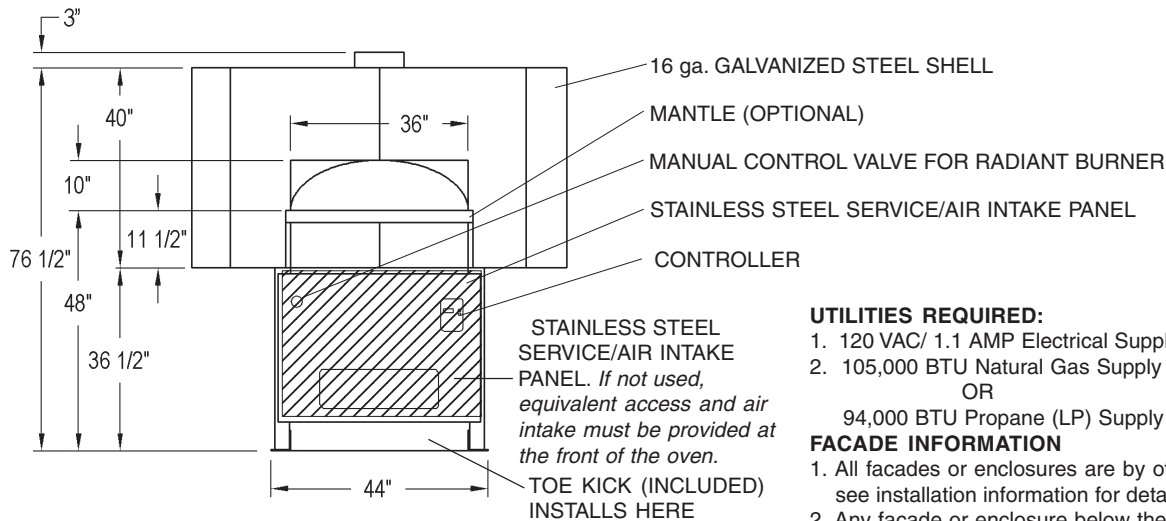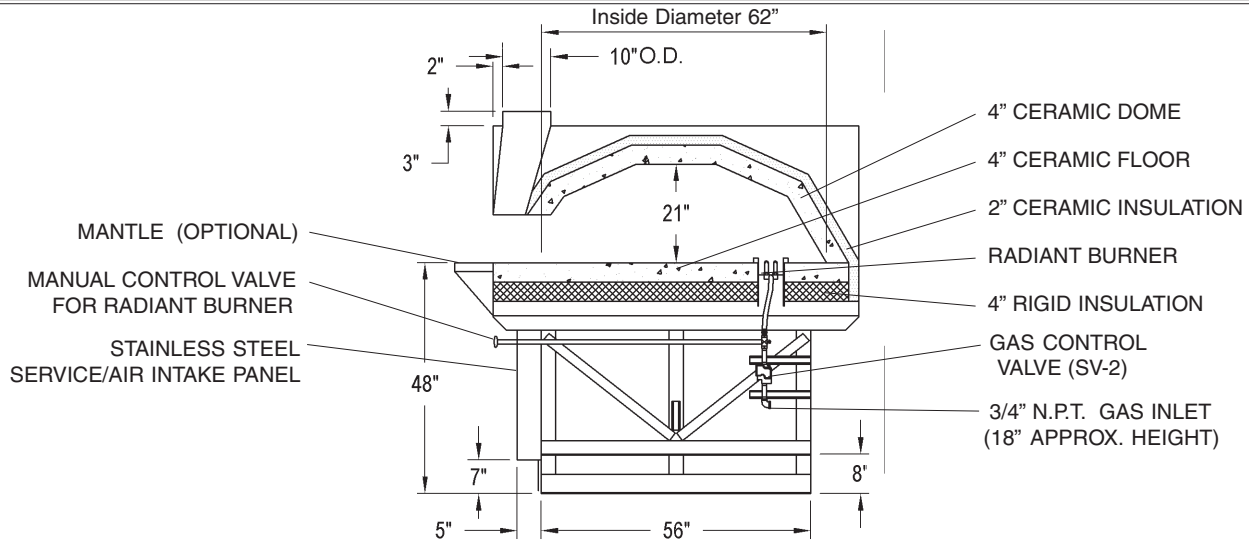

#### UTILITIES REQUIRED:

- 120 VAC/ 1.1 AMP Electrical Supply
- 105,000 BTU Natural Gas Supply  
OR  
94,000 BTU Propane (LP) Supply


#### FACADE INFORMATION

- All facades or enclosures are by others; see installation information for details.
- Any facade or enclosure below the mantle must allow the following:

- Unobstructed access 20 inches to each side of centerline for removal of service / intake panel.
- Easy access to all controls.
- Sufficient combustion air for gas burner; see installation information for details.

#### VENTING INFORMATION

Our gas ovens are listed for direct venting through a power-ventilated, grease-duct-rated chimney or through a Listed Type 1 exhaust hood or one constructed in accordance with all relevant local and national codes. The oven must be vented as a solid fuel appliance. The oven should be vented in accordance with all relevant local and national codes, and in a manner acceptable to the authority having jurisdiction.

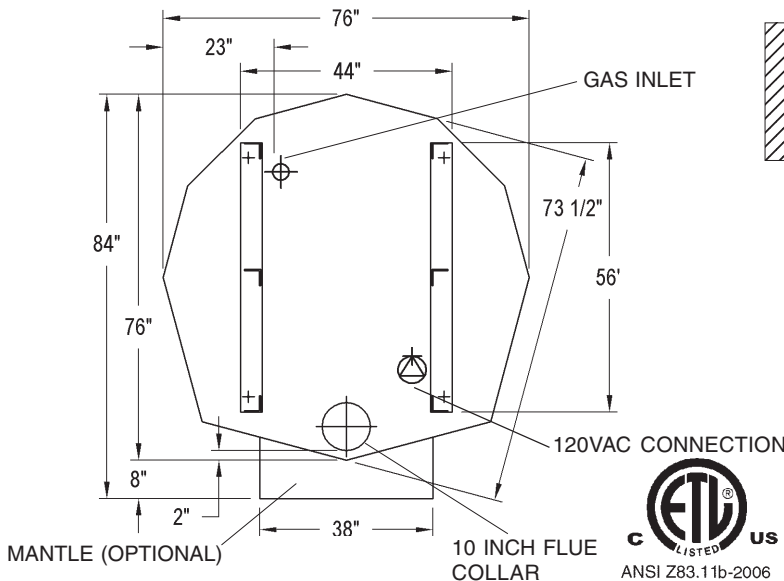

Unit Shipping Weight: 4,600 lbs.



**Wood Stone**  
1801 W. Bakerview Rd. Corporation  
Bellingham, WA 98226  
Toll Free (800) 988-8103  
Tel (360) 650-1111  
Fax (360) 650-1166

An ongoing program of product improvement may require us to change specifications without notice.

Revised October 2007

Call Us Toll Free 1-800-988-8103 [www.woodstone-corp.com](http://www.woodstone-corp.com)